
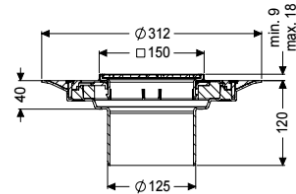


Variofix upper section Slotted cover, 316 SST, K 3

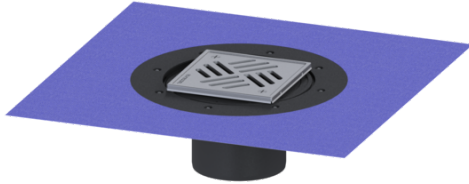

Article information

Item no.: 48206
 GTIN: 4026092066546
 Price group: 10

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

| | |
|--|---|
| System: | 125 |
| Seal: | Lip seal |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W3-I |

General characteristics

| | |
|-------|----|
| ATEX: | no |
|-------|----|

Dimensions

| | |
|-------------------------------|-------------------------------------|
| Vertical adjustment: | 10 - 18 mm |
| Net weight: | 0,85 kg |
| Gross weight: | 1,86 kg |
| Diameter: | 312 mm |
| Type of height adjustability: | vertically adjustable upper section |
| Height: | 120 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

Coverage features

| | |
|-------------------------|--------------------------------|
| Type of cover: | Slotted cover |
| Cover material: | 316 stainless steel |
| Colour of cover: | silver |
| Frame material: | 316 stainless steel |
| Locking: | screwed |
| Load class: | K 3 (EN 1253-1) |
| Grating design: | Kessel |
| Rim width: | 150 mm |
| Rim length: | 150 mm |
| Upper section: | adjustable in three dimensions |
| Shape of upper section: | square |
| Upper section material: | ABS |