



## Variofix upper section System 200, slot grat., 304 SST, L 15

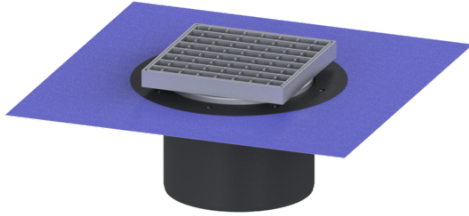

### Article information

Item no.: 48969  
 GTIN: 4026092005132  
 Price group: 70

### Advantages

- Different covers selectable
- Including waterproofing membrane

### Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

System:	200
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W3-I

General characteristics

ATEX:	no
-------	----

Dimensions

Vertical adjustment:	30 - 50 mm
Net weight:	2,99 kg
Gross weight:	3,72 kg
Diameter:	320 mm
Type of height adjustability:	vertically adjustable upper section
Height:	150 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Coverage features

Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Height of cover:	28 mm
Surface:	pickled
Locking:	placed
Load class:	L 15 (EN 1253-1)
Grating design:	Cross
Rim width:	200 mm
Rim length:	200 mm
Upper section:	adjustable in three dimensions
Shape of upper section:	square
Upper section material:	ABS
Mesh size:	23 x 23 mm