


Ferrofix upper section Sys200, slot grat, 304SST, 300 x 300 mm

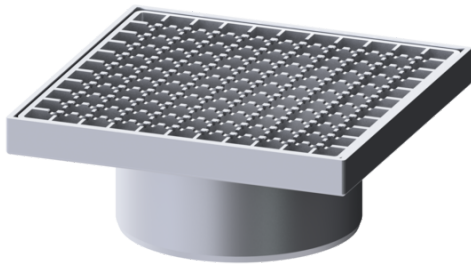

Article information

Item no.: 57415
 GTIN: 4026092010471
 Price group: 70

Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies.

Description

Used in combination with a drain body of the KESSEL modular system 200, the stainless steel upper section is suitable for indoor point drainage.

Variant	
System:	200
Note on installation depth:	For load class M 125, on-site shimming necessary
General characteristics	
ATEX:	no
Dimensions	
Net weight:	7,97 kg
Gross weight:	8,48 kg
Length:	300 mm
Width:	300 mm
Height:	115 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Coverage features	
Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Width of cover:	282 mm
Height of cover:	28 mm
Length of cover:	282 mm
Surface:	pickled
Locking:	unscrewed
Load class:	M 125 (EN 1253-1)
Upper section material:	Stainless steel 14301

Mesh size:

23 x 23 mm