


Slotted Channel Ferrofix glued flange H: 6mm, 17x1400mm, outer

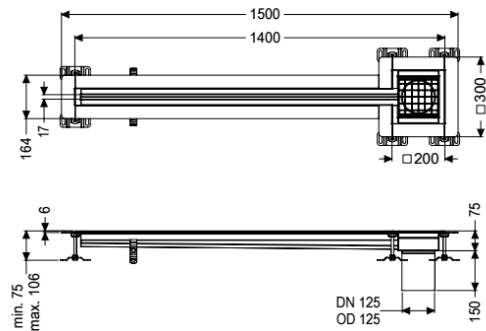

Article information

Item no.: 6202141
 GTIN: 4026092099612
 Price group: 80

Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix slotted channel made of stainless steel with a material thickness of 1.5 mm (pickled in the immersion bath) is equipped with ground crosspieces, longitudinal and transverse gradients, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for thin-layered floorings (e.g. epoxy resin) and has an all-round adhesive rim (6 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is also suitable for connecting waterproofing.

Variant

| | |
|---|--|
| Waterproofing layer on the upper section: | Adhesive flange (suitable for moisture barriers) |
| Position of sink trap: | outside |
| Glued flange height: | 6 mm |

General characteristics

| | |
|----------------------|-----------------------|
| Material: | Stainless steel 14301 |
| Nominal size (DN): | 125 |
| Outer diameter (OD): | 125 mm |
| Glued flange height: | 6 mm |
| ATEX: | no |

Dimensions

| | |
|---------|---------|
| Length: | 1400 mm |
| Width: | 17 mm |
| Height: | 75 mm |

Coverage features

| | |
|------------------------|--|
| Type of cover: | Slotted cover |
| Colour of cover: | silver |
| Width of cover: | 200 mm |
| Length of cover: | 200 mm |
| Locking: | placed |
| Load class: | L 15 (EN 1253-1) |
| Slip resistance class: | R12 according to DIN 51130; C according to DIN 51097 |
| Slot width: | 17 mm |