


## Replacement pump, Minilift F with seal monitoring

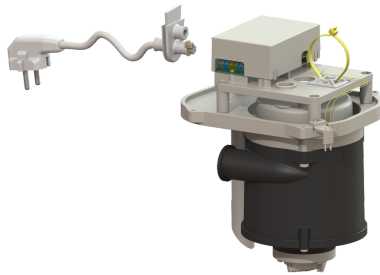

### Article information

Item no.: 680546  
 GTIN: 4026092075111  
 Price group: 90

### Description

Replacement pump for Minilift F

#### General characteristics

ATEX: no

#### Dimensions

Net weight: 3,89 kg  
 Gross weight: 4,89 kg  
 Packaging dimension: length  
 Packaging dimension: width  
 Packaging dimension: height

#### Pumping device

Number of pumps: 1  
 Connection type: Schuko (earthed contact) 2-pin  
 Operating voltage: 230 V  
 Mains frequency: 50 Hz  
 Rated current: 2,8 A  
 Temperature monitoring: integrated  
 Max. temperature (permanent) of conveyed material: 35 °C  
 Max. pumping height: 6,4 m  
 Speed: 2900 U/min  
 Power P1: 0,65 kW  
 Power P2: 0,35 kW  
 Operating mode: S3 - 30 %  
 Type of pump connection cable: H03 VV-F 3G 0.75 mm<sup>2</sup>  
 Impeller type: Macerator  
 Length of mains cable for pump: 1,6 m

#### Control

Connection type: Schuko (earthed contact) 2-pin