


Replacement pump, Minilift F with seal monitoring

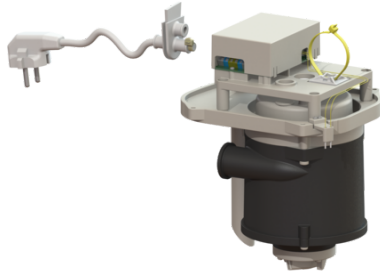

Article information

Item no.: 680546
 GTIN: 4026092075111
 Price group: 90

Description

Replacement pump for Minilift F

Dimensions

Net weight: 3,89 kg
 Gross weight: 4,89 kg
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Pumping device

Number of pumps: 1
 Connection type: Schuko (earthed contact) 2-pin
 Rated current: 2,8 A
 Length of mains cable for pump: 1,6 m
 Temperature monitoring: integrated
 Max. temperature (permanent) of conveyed material: 35 °C
 Max. pumping height: 6,4 m
 Speed: 2900 U/min
 Power P1: 0,65 kW
 Power P2: 0,35 kW
 Operating mode: S3 - 30 %
 Type of pump connection cable: H03 VV-F 3G 0.75 mm²
 Impeller type: Macerator

Control

Mains frequency: 50 Hz
 Operating voltage: 230 V
 Connection type: Schuko (earthed contact) 2-pin
 Rated current: 2,8 A